

Minsu

Indoor Lighting - Industrial Lighting



Colour Options 
Ral 9006

TECHNICAL INFORMATION

Housing Extruded Aluminum Profile
Side Cover PC Injection
Diffuser Opal Diffuser
Paint Anodized Coating
Dimensions(mm) 50(W) x 71(H)

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 130°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL


Power (W) 11-50W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- AC-DC Supply(MBS)
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- PIR Sensor

ASSEMBLY

Installation Type Surface Mounted
Mounting Apparatus Metal Bracket

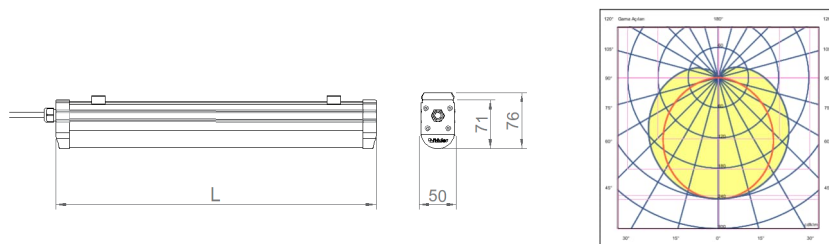

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
07104.03.40.013	11	1390	4000	Ra>80	50x315x71	0,4
07104.04.40.016	13	1590	4000	Ra>80	50x455x71	0,5
07104.04.40.020	16	2020	4000	Ra>80	50x455x71	0,5
07104.07.40.019	15	1930	4000	Ra>80	50x735x71	0,7
07104.07.40.024	18	2300	4000	Ra>80	50x735x71	0,7
07104.07.40.030	24	3100	4000	Ra>80	50x735x71	0,7
07104.07.40.033	26	3180	4000	Ra>80	50x735x71	0,7
07104.08.40.037	29	3740	4000	Ra>80	50x875x71	0,7
07104.10.40.028	20	2780	4000	Ra>80	50x1015x71	1,0
07104.10.40.033	25	3380	4000	Ra>80	50x1015x71	1,0
07104.10.40.038	29	3830	4000	Ra>80	50x1015x71	1,0
07104.10.40.043	33	4260	4000	Ra>80	50x1015x71	1,0
07104.11.40.033	23	3200	4000	Ra>80	50x1155x71	1,6
07104.11.40.038	29	3800	4000	Ra>80	50x1155x71	1,6
07104.11.40.044	34	4320	4000	Ra>80	50x1155x71	1,6
07104.11.40.050	40	4960	4000	Ra>80	50x1155x71	1,6
07104.14.40.041	30	4020	4000	Ra>80	50x1435x71	1,9
07104.14.40.066	37	4850	4000	Ra>80	50x1435x71	1,9
07104.14.40.048	43	5460	4000	Ra>80	50x1435x71	1,9
07104.14.40.062	50	6200	4000	Ra>80	50x1435x71	1,9